
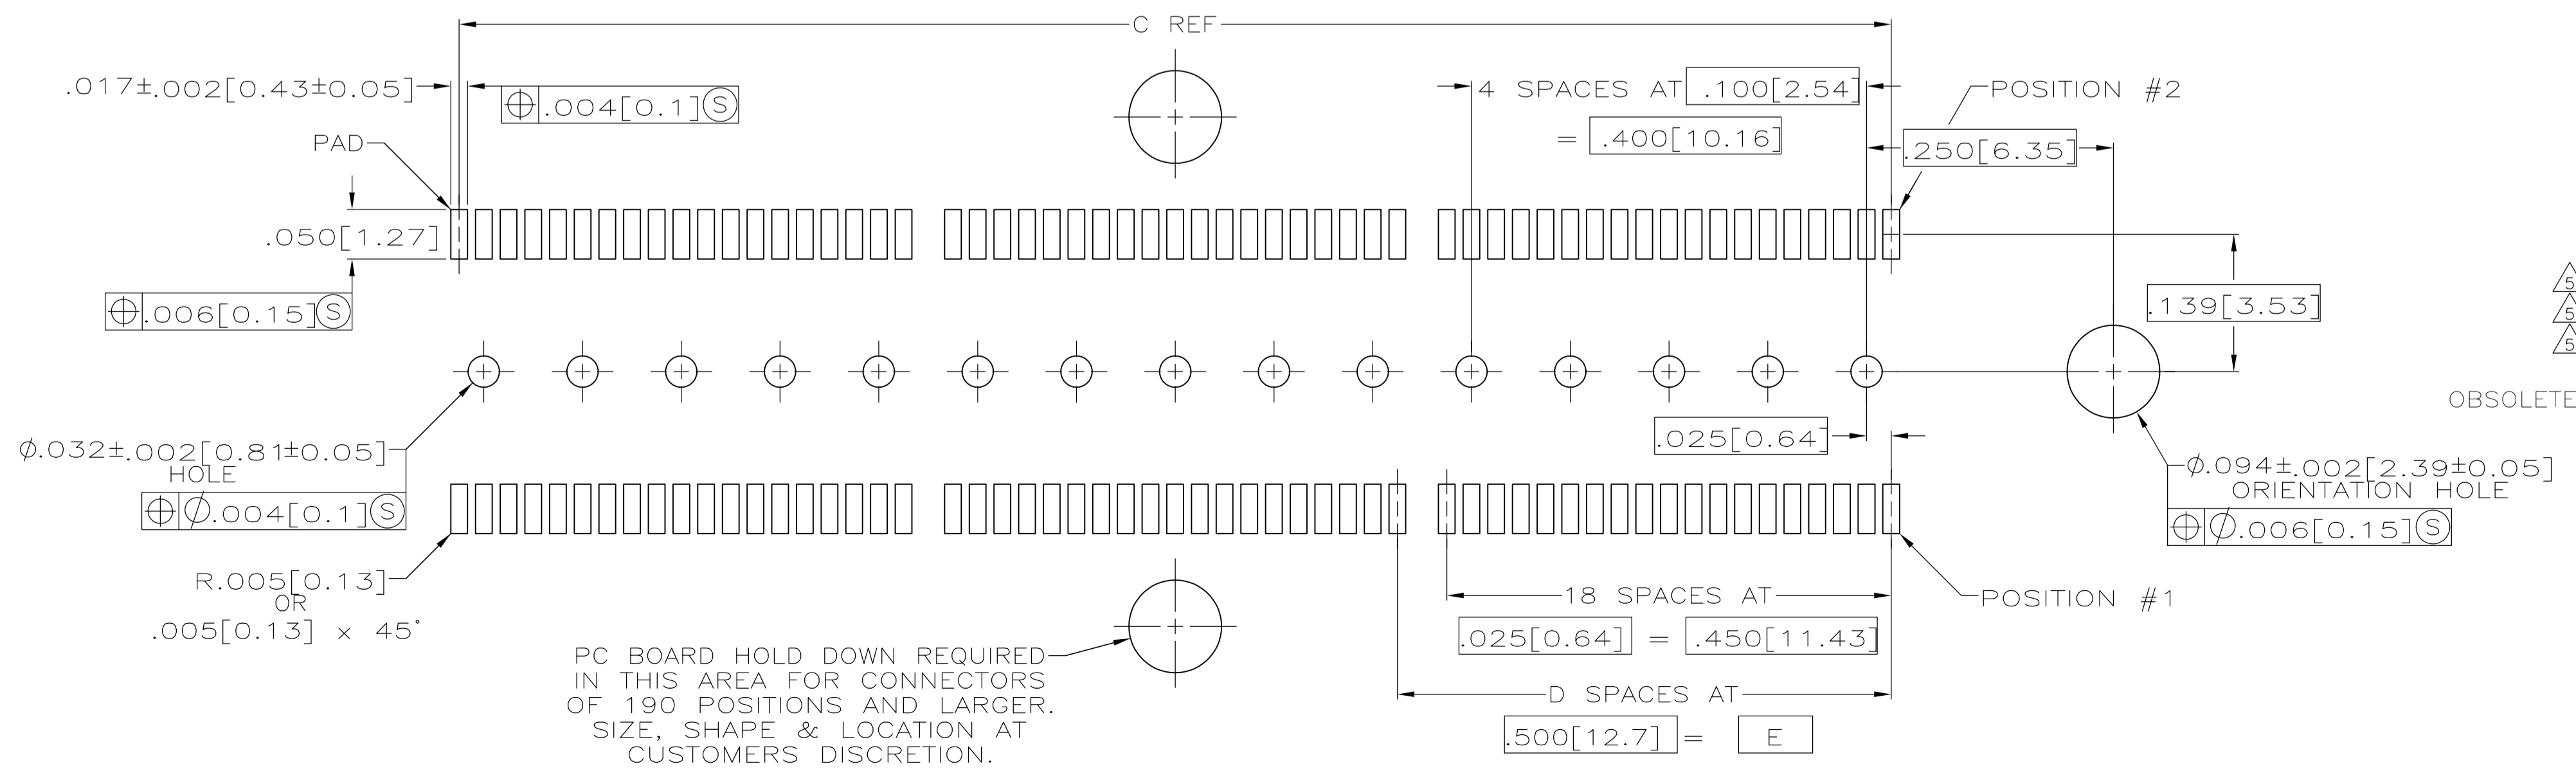
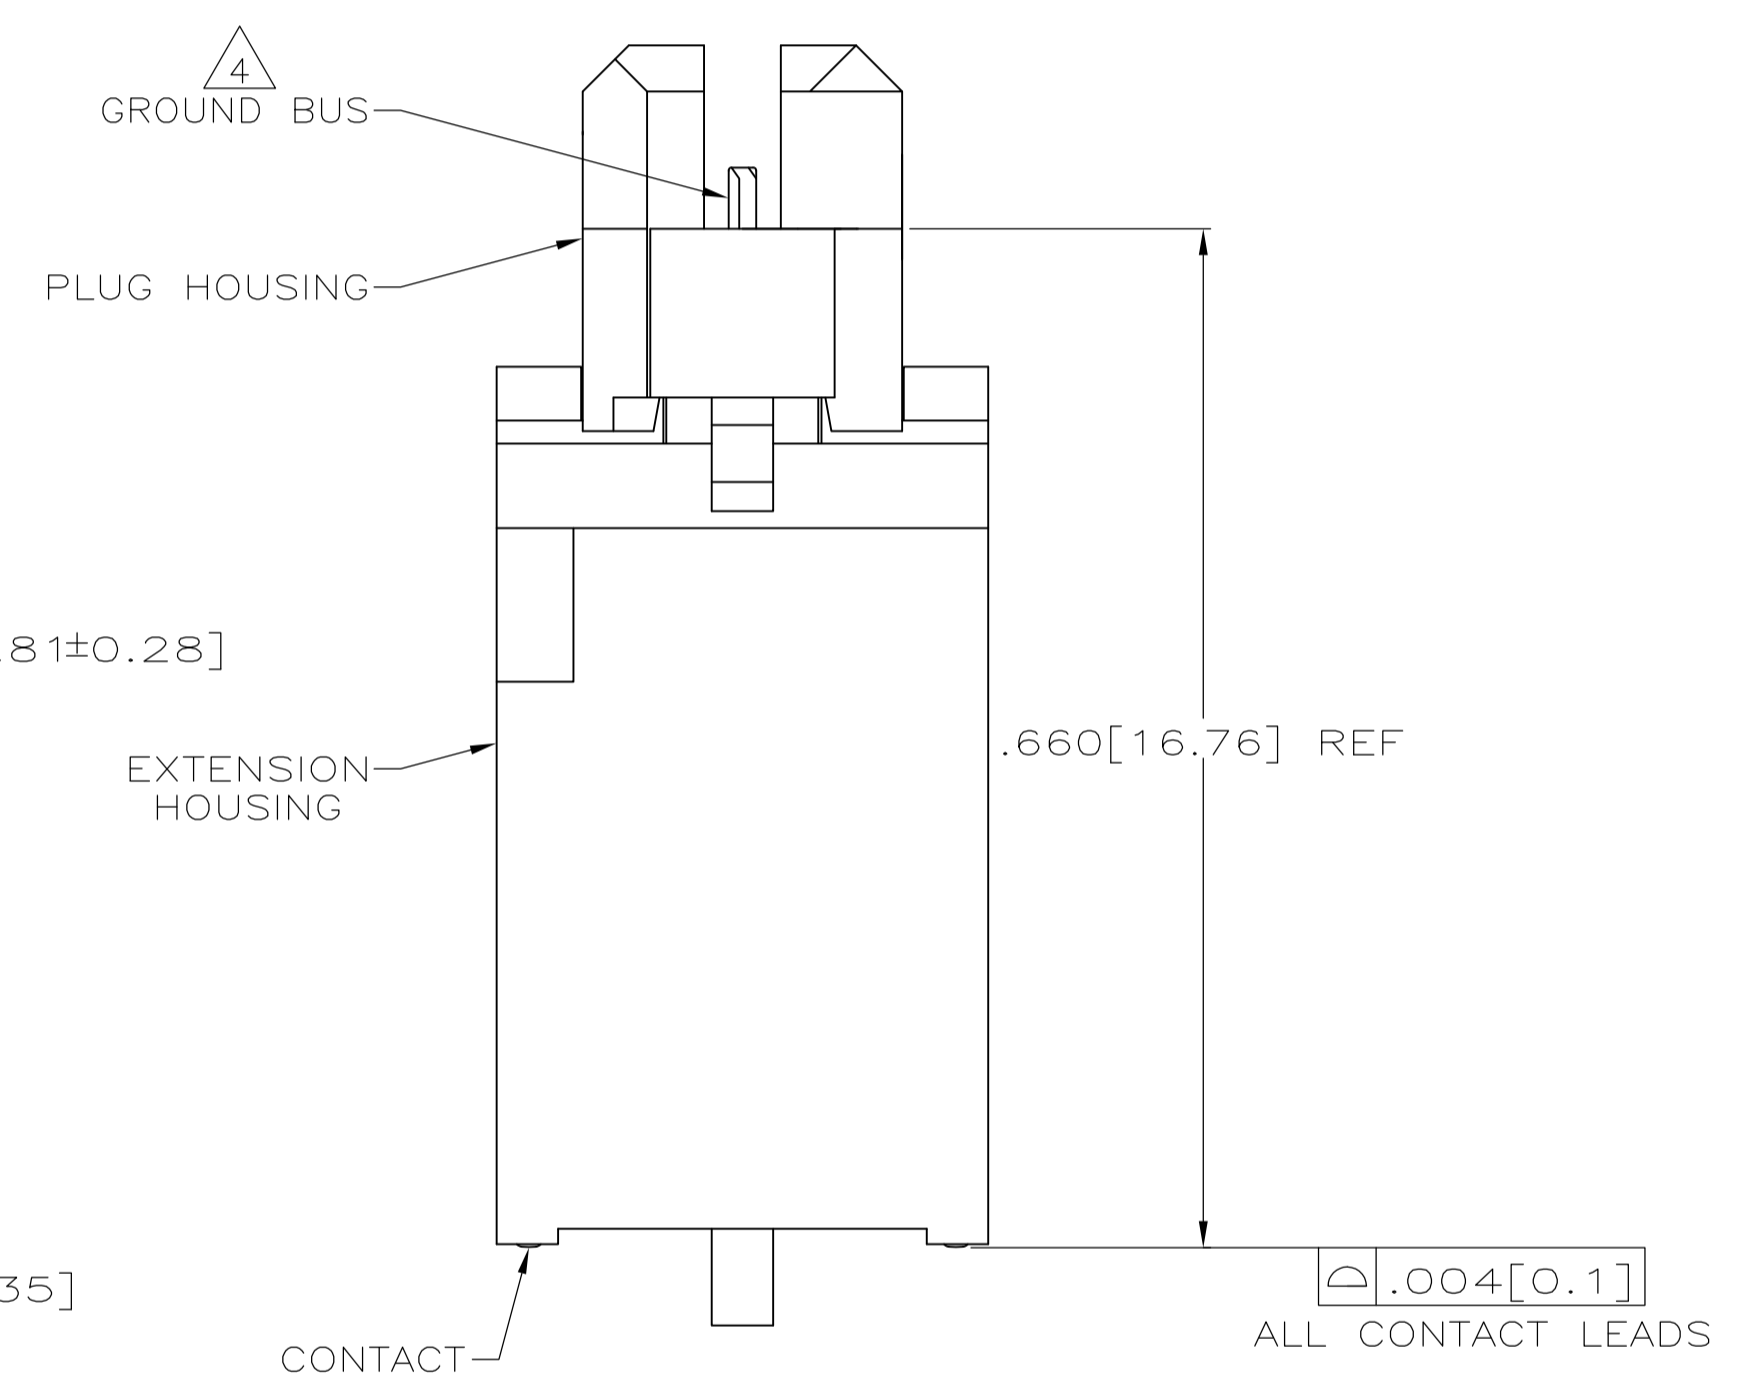


- 1 HOUSINGS: LIQUID CRYSTAL POLYMER, COLOR BLACK. CONTACTS: HIGH RELIABILITY COPPER ALLOY. GROUND BUSES: BRASS, UNS C26000
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- 3 DATE CODE MARKED IN AREA INDICATED ON SMAE SIDE AS POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 THIS ASSEMBLY HAS A VACUUM PICK-UP COVER PLACED ON CENTER OF HOUSING AND IS PACKAGED IN EXTRUDED TUBES.

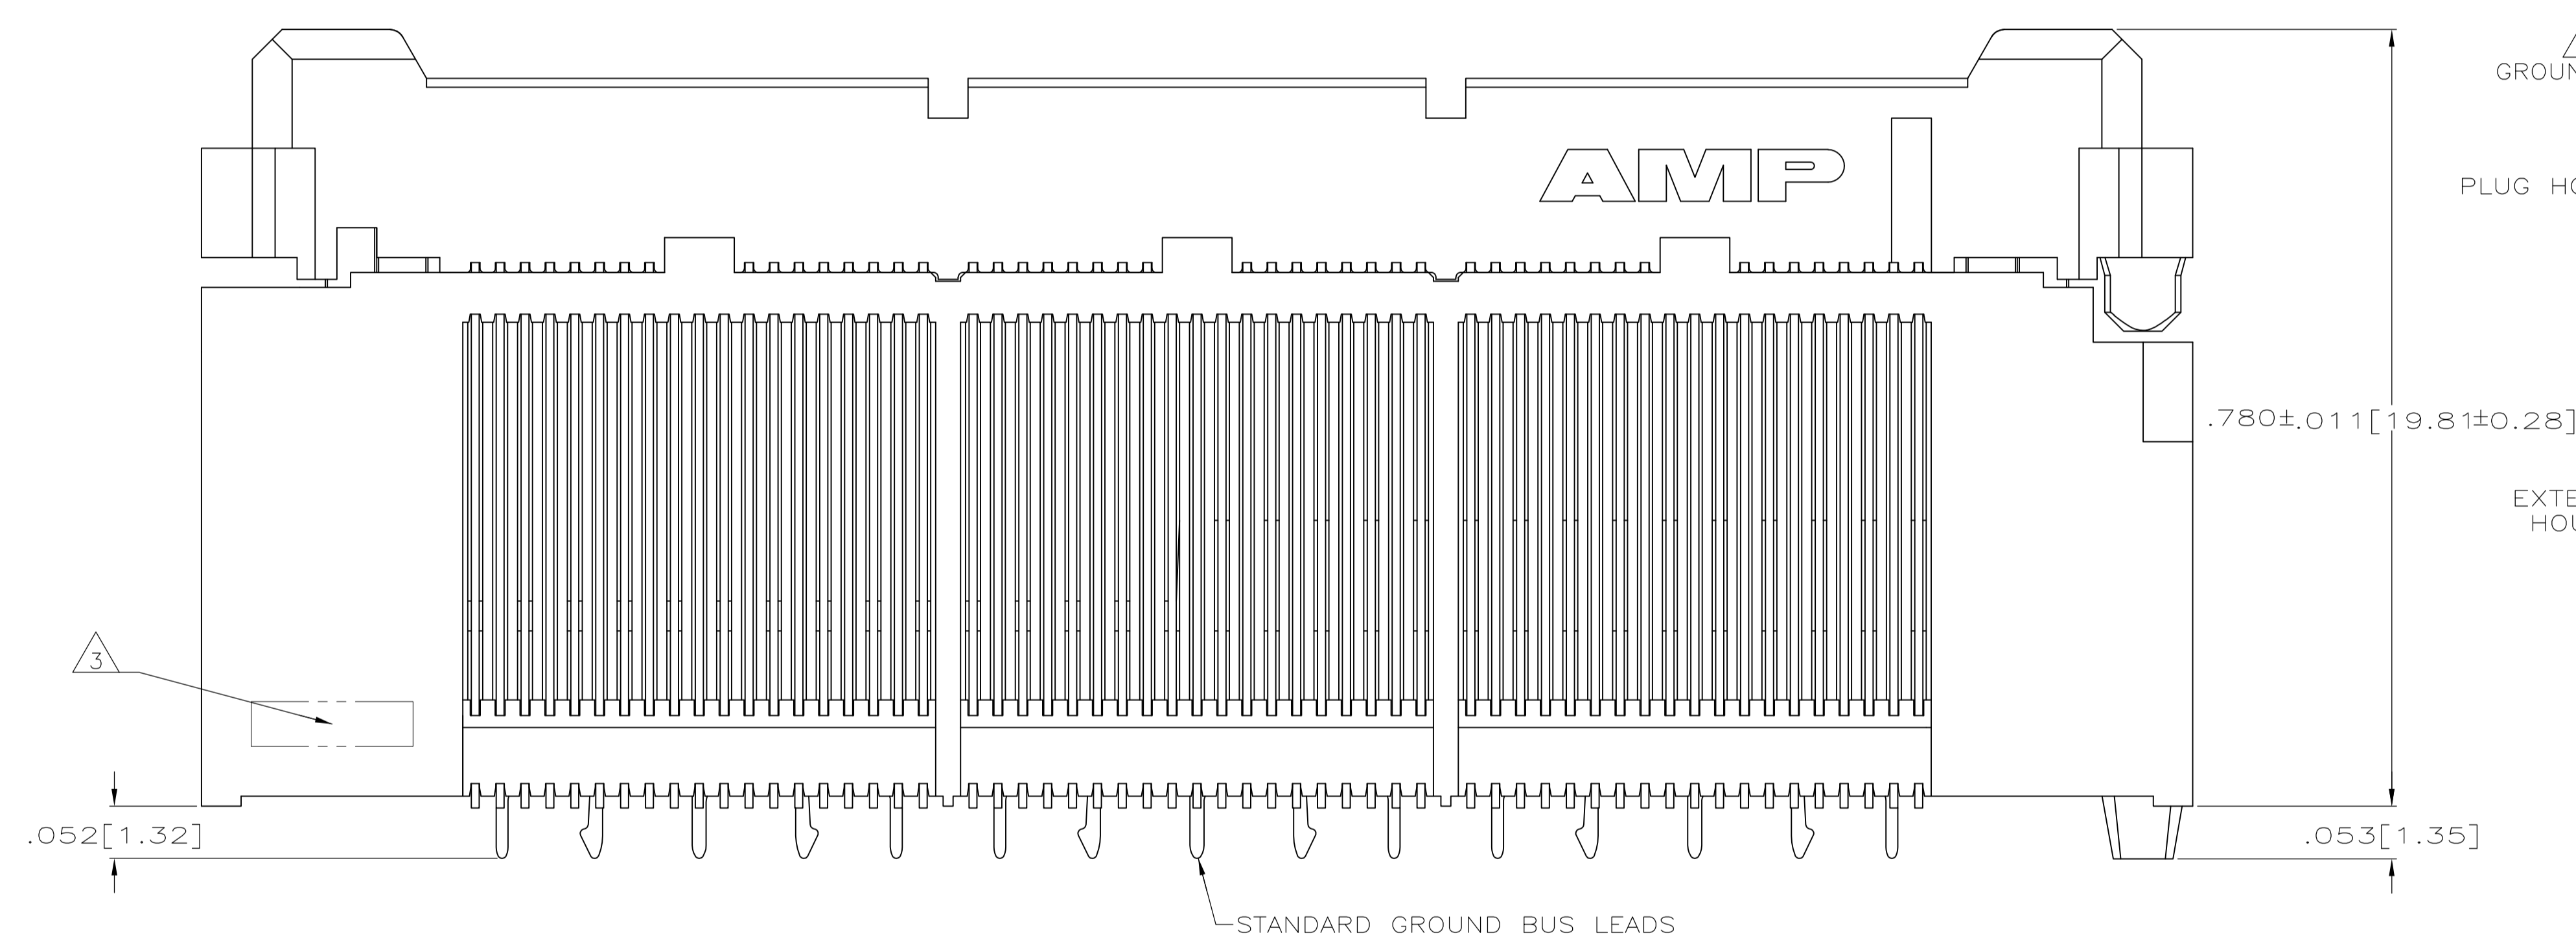

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	1-767032-9
1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	1-767032-7
.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	1-767032-6
3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	767032-7
2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228	767032-6
2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	767032-5
1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	767032-4
1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	767032-3
.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	767032-2
.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	767032-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J.GERACE 12MAR98		STE TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.STRICKLER 12MAR98 NAME	
0 PLC ± -		1 PLC ± -		PRODUCT SPEC 108-1422	
2 PLC ± -		3 PLC ± .005(0.13)		APPLICATION SPEC 114-11004	
3 PLC ± -		4 PLC ± -		SIZE CASE CODE DRAWING NO A1 00779 C=767032	
4 PLC ± -		ANGLES ± -		RESTRICTED TO	
MATERIAL 1		FINISH 2		WEIGHT	
				CUSTOMER DRAWING SCALE 8:1 SHEET 1 OF 1 REV S1	